

Gorman-Redlich Mfg. Co. are the experts with more than 35 years of excellence in broadcast alerting.

Our EASI TV/CG (Emergency Alert System—television/character generator) equipment has been deployed in many broadcast television and cable provider installations for two decades, providing a reliable, affordable solution for video-based alerting.

EASI TV/CG equipment is based on our proven Emergency Alert System platform. These units can accommodate up to two channels with on-board character generators and up to four additional channels with our external CG panel.

The EASI TV/CG unit seamlessly integrates with the Gorman-Redlich CAP-DEC I Common Alerting Protocol (CAP)-to-EAS universal intermediary device, allowing it to receive emergency alert messages over-the-air or from online alert services such as FEMA/IPAWS (US) and Pelmorex (Canada).

The interface with the CAP-DEC I also accommodates *CAP Enhanced Text*, which is displayed on all on-board and external character generator channels.


EASI TV/CG

BENEFITS

- FCC Part 11 certified EAS encoder/decoder
- Ships pre-configured for your station
- Supports up to six channels
- No “Support Sunset”




FEATURES

- Two on-board character generators
- Expandable to support up to six channels
- Independent station ID on all channels
- User programmable via software/front panel
- Meets 6th R&O requirements (v20.9+)
- Supports *CAP Enhanced Text* (when used with Gorman-Redlich CAP-DEC I)
- Generate alerts from front panel or optional telephone interface
- Highly Configurable
- Multiple logging options

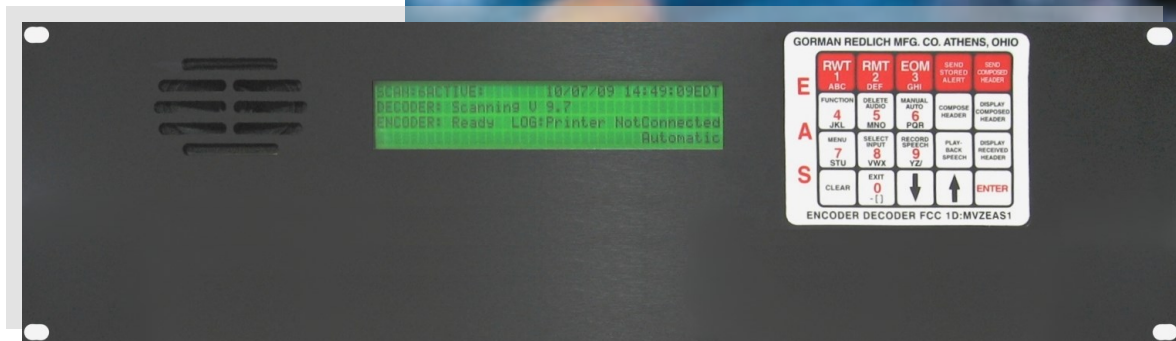

Phone: 740-593-3150
www.Gorman-Redlich.com

Gorman-Redlich Mfg. Co.
 257 W Union St
 Athens, OH 45701

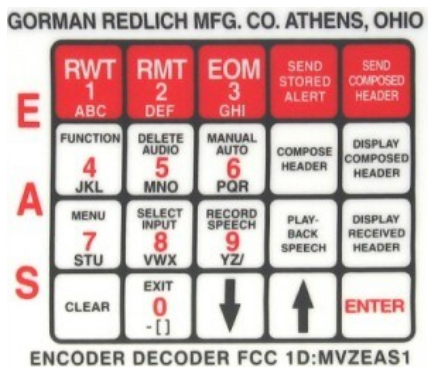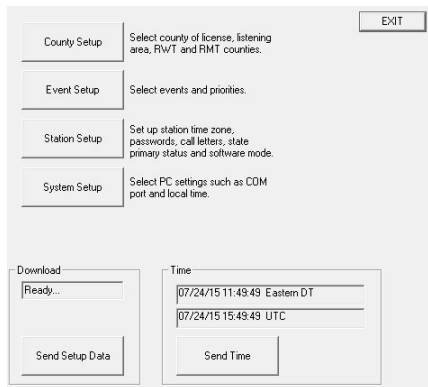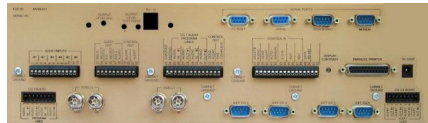

▶ Specifications & Features

HARDWARE

Height	3 Rack Unit—5.25 in
Width	Standard 19 inch Rack Mount
Video Channels	Up to 2 on-board, (up to 6 w/ optional panel)
Audio Inputs	6 channel, wire terminals
Video	Analog video loop-through, BNC connectors
Logging	Parallel, Serial (to printer or logging software)
Power	9VDC IA
Alert Crawl	EAS generated text crawl, CAP Enhanced Text (with optional CAP-DECI)
Conformity	Current through 6th R&O with v20.9+
Support Lifecycle	No “Support Sunset”
CAP Support	With optional Gorman-Redlich CAP-DEC I
FCC ID	MVZEAS1—Part II certified
Security	Technician and Operator password protection
Alert Generation	Via front panel, optional phone interface. One-button RWT and RMT.
Display	4x40 character backlit LCD
Configuration	Via front panel or PC software. Ships pre-configured for your station.